


TPR THERMAL PRINTER

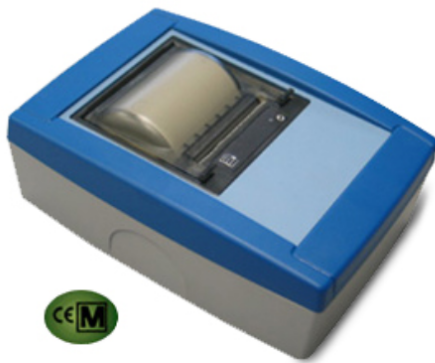


OBTPRB

Thermal printer available either for panel mounting as well as attached to the indicator. Its versatility makes it suitable to satisfy all printing requirements in the industrial field.

TECHNICAL SPECIFICATIONS


- PRINT METHOD: Thermal
- RESOLUTION: 203 dpi
- COLUMNS: 24/40
- PAPER WIDTH: 58 mm
- ROLL SIZE: Diameter of 50 mm
- PRINT SPEED: up to 50 mm/sec
- PRINT FORMATS: Normal, double height and width, negative, underlined, expanded
- PRINT DIRECTION: Straight, upside down
- GRAPHICS MEMORY: 1 logo 384 x 85 dots, programmable upon request in combination with DFW / CPWE / 3590E series indicators

N.B. ACCESSORY WHICH MAY BE ORDERED ONLY COMBINED WITH A SUITABLE WEIGHT INDICATOR

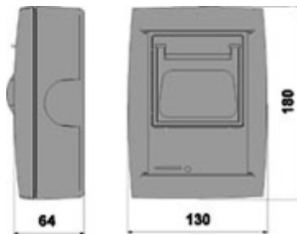


OBTPRB - dimensions in mm


Table version

Code	Description
 OBTPRB	Table thermal printer. For weight indicator, with IP40 ABS case, 1,5 m connection cable and internal power supply.


Attached mounting version

Code	Description
 OBTPRB	Thermal printer for mounting attached to indicator, with IP40 ABS case. Fitted with connection cable. Power supply from weight indicator.

Panel mounting version

Code	Description
 TPRP	Panel thermal printer. Fitted with connection cable, 5Vdc power supply (power adapter not included).

Power supply

Code	Description
 TPRPCAL	5Vdc power supply unit.