

Approvals




Part Number/Price

Part #	Size (W × LW × H)	Capacity	Est. Weight	Price
107493	5 ft × 5 ft × 11 in	40,000 lb (20,000 kg)	1,900 lb	Consult
107494	5 ft × 5 ft × 11 in	60,000 lb (30,000 kg)	1,900 lb	Consult
107495	5 ft × 5 ft × 11 in	80,000 lb (40,000 kg)	1,900 lb	Consult
107496	6 ft × 6 ft × 11 in	40,000 lb (20,000 kg)	2,575 lb	Consult
107497	6 ft × 6 ft × 11 in	60,000 lb (30,000 kg)	2,575 lb	Consult
107498	6 ft × 6 ft × 11 in	80,000 lb (40,000 kg)	2,575 lb	Consult

Options/Accessories

Part #	Description	Price
114678	V-Top coil cradle (5 × 5 ft scale)	Consult
114684	V-Top coil cradle (6 × 6 ft scale)	Consult
Consult	Pit coping	Consult

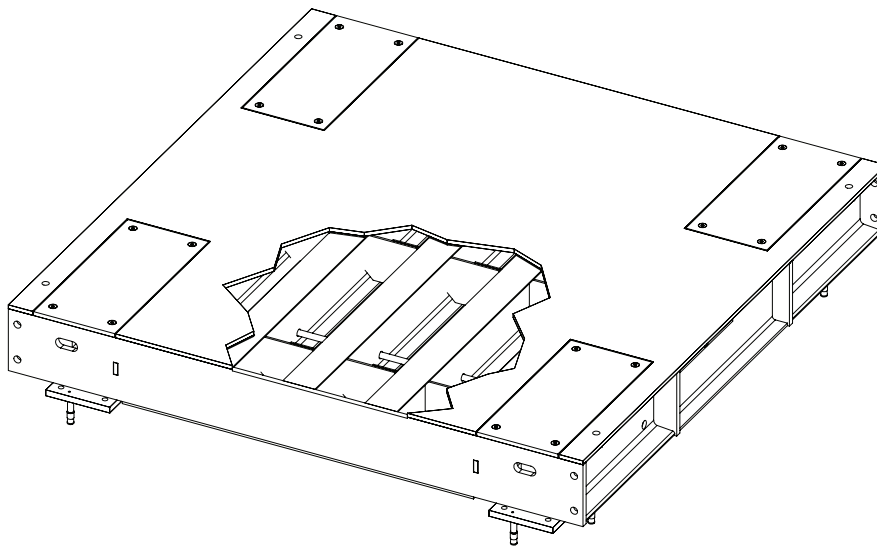

Standard Features

- Capacities: 40,000 to 80,000 lb; consult factory for custom capacities
- Deck thickness: 1/2 in smooth top plate
- MVS self-checking mounting system, top access to load cells
- Black epoxy paint
- 20 ft SURVIVOR® EL147HE hostile environment load cell cable
- Ships unassembled with eight concrete anchor bolts

Specifications

Capacities:

Scale, load cell mount :
 40,000 lb: Qty 4 50,000 lb each
 60,000 lb: Qty 4 50,000 lb each
 80,000 lb: Qty 4 75,000 lb each

Understructure Clearance:

1.91 in minimum

Cable Length:

20 ft (6.1 m) for connecting junction box to indicator

Junction Box:

TuffSeal® JB4SS stainless steel, NEMA Type 4X junction box with signal trim card

Welding:

Stitch

Warranty (limited):

Weldment: Five-year
 Load cells: Two-year
 All other components: One-year


Approvals:

NTEP CC 11-068, Class III, 5,000 d

Dimensions

RoughDeck CS			
5 × 5 ft V-Top Coil Cradle			
A	60.00 in	D	3.64 in
B	60.00 in	E	14.95 in
C	12.30 in	F	25°
6 × 6 ft V-Top Coil Cradle			
A	72.00 in	D	3.99 in
B	72.00 in	E	14.96 in
C	22.62 in	F	24°

Note: 1 in=25.4 mm

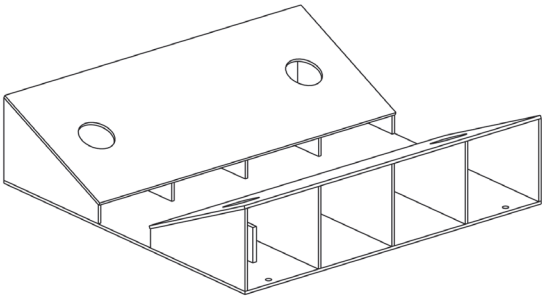

V-Top Coil Cradle

